

# EXEGER™

Powerfoyle Hybrid solar cells are ideal for developing solar-powered products that use indoor and outdoor light such as headphones, trackers, IoT devices, consumer electronics and more.

---

## PRODUCT BRIEF

---

### POWERFOYLE HYBRID 1.3


---

## Powerfoyle™

At Exeger, we have reinvented the dye-Sensitized Solar Cell [DSC] with a new architecture that improves performance, provides greater flexibility and offers seamless integration possibilities.



High performance in indoor and outdoor light



Unaffected by partial shading




Surface textures



Flexible and durable




Environmentally-conscious




Design freedom

A [based on PF105]

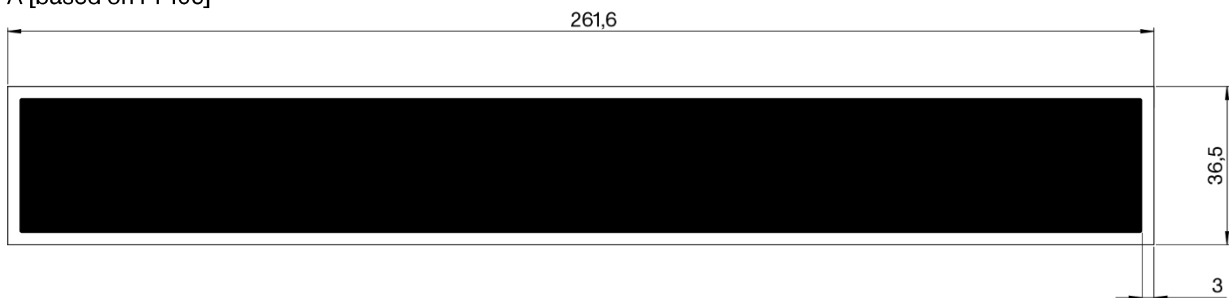

B [based on PF107]

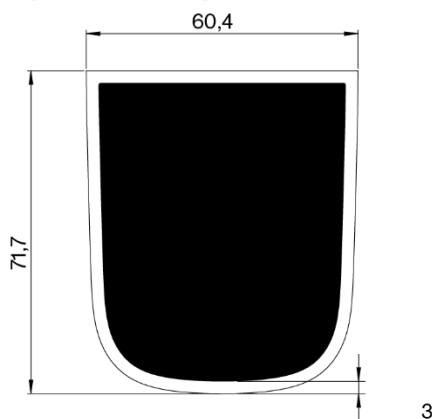

## NOTES

Unless otherwise stated, all data shown is for 25° C and is based on initial measurements directly after manufacturing. The light source used for measurements and data is YUJI D50 and the lux level is calibrated with DIG LUX 9500.

## TYPICAL CURRENT TO BATTERY AT 3.7 V

| Size Absorber Area [cm <sup>2</sup> ] | 500 Lux [mA] | 5 000 Lux [mA] | 50 000 Lux [mA] |
|---------------------------------------|--------------|----------------|-----------------|
| 78.0 A [PF105]                        | 0.22         | 3.2            | 24.2            |
| 33.5 B [PF107]                        | 0.08         | 1.3            | 11.0            |

Values calculated from typical power density and overall boost converter efficiency. Typical performance variation is ±10% and is design dependent.

# SPECIFICATIONS

|                                     | Min                                     | Max     |
|-------------------------------------|---|---------|
| Illuminance range [lux]             |   |         |
| Attuned range                       | 500                                     | 30 000  |
| Working range                       | 100                                     | 100 000 |
| Temperature range [°C]              |   |         |
| Ideal operating temperature         | 0                                       | 40      |
| Maximum temperature range -         | -40                                     | 60      |
| Spectral response [nm]              |   |         |
| Attuned range "                     | 400                                     | 750     |
| Ideal absorbance                    | 400                                     | 650     |
| Weight* per cm <sup>2</sup> [g]     | 0.16                                    | 0.21    |
| Thickness <sup>+</sup> [mm]         | 1.3±0.2                                 |         |
| Typical dimensional tolerances [mm] | ±0.3                                    |         |
| Typical bend radius <sup>#</sup>    | A [PF105]: >60 mm<br>B [PF107]: >200 mm |         |


- <20% average performance reduction after 500h at 65°C /85%RH in darkness
- " Visible light
- \* Depends on cell size
- + Depends on top layer and texture  
Excluding contact point and fpc.
- # Depends on design, especially aspect ratio

# TEMPERATURE DEPENDENCY

| Lux   | Temp Coeff Power [%/°C] | Temp Coeff Vmpp [%/°C] | Range, cell temperature [°C] |
|-------|-------------------------|------------------------|------------------------------|
| 200   | -2,4                    | -1,1                   | 18-27                        |
| 500   | -1,2                    | -0,9                   |                              |
| 1000  | -0,8                    | -0,6                   |                              |
| 2000  | -0,5                    | -0,6                   |                              |
| 5000  | -0,4                    | -0,4                   |                              |
| 10000 | 0,0                     | 0,0                    |                              |
| 20000 | 0,1                     | -0,2                   | 25-35                        |
| 30000 | 0,2                     | -0,4                   |                              |
| 50000 | 0,5                     | 0,0                    |                              |

Measured on A [PF105]. Temperature coefficient calculated versus cell performance at 25°C.


# POWER DENSITY [TYPICAL CELL PERFORMANCE]

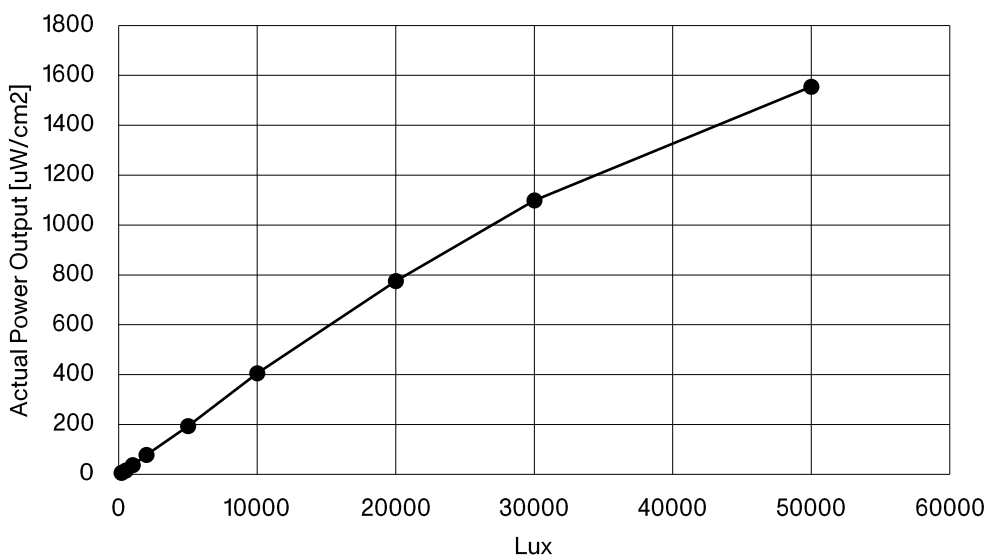

Same values as graph

| Lux    | Actual Power output [uW/cm2] |
|--------|------------------------------|
| 200    | 5.4                          |
| 500    | 15.5                         |
| 1 000  | 36.1                         |
| 2 000  | 77.9                         |
| 5 000  | 193.4                        |
| 10 000 | 405.6                        |
| 20 000 | 775.5                        |
| 30 000 | 1098.5                       |
| 50 000 | 1554.8                       |


## MAXIMUM POWER POINT VOLTAGE [TYPICAL CELL PERFORMANCE]

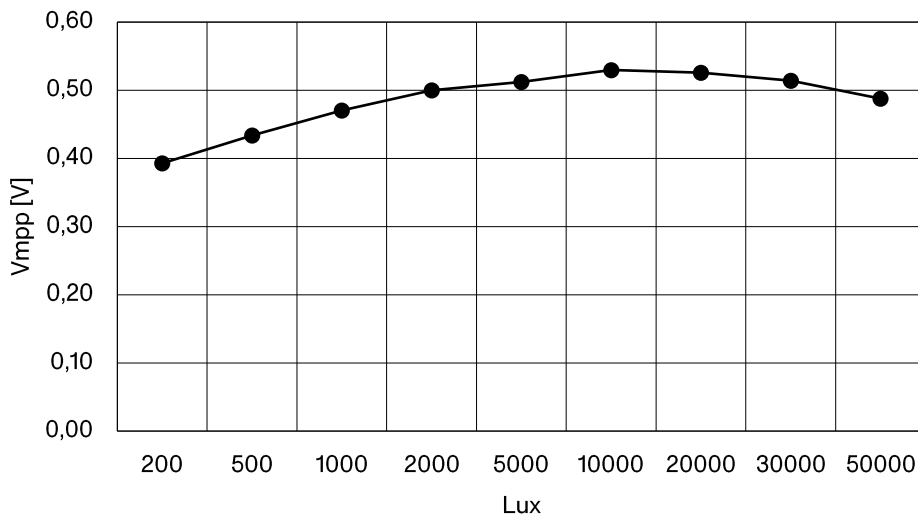

Same values as graph

| Lux    | Maximum power point voltage [V] |
|--------|---------------------------------|
| 200    | 0.39                            |
| 500    | 0.43                            |
| 1 000  | 0.47                            |
| 2 000  | 0.50                            |
| 5 000  | 0.51                            |
| 10 000 | 0.53                            |
| 20 000 | 0.53                            |
| 30 000 | 0.51                            |
| 50 000 | 0.49                            |

## BOOST CONVERTER EFFICIENCY [TYPICAL PERFORMANCE]

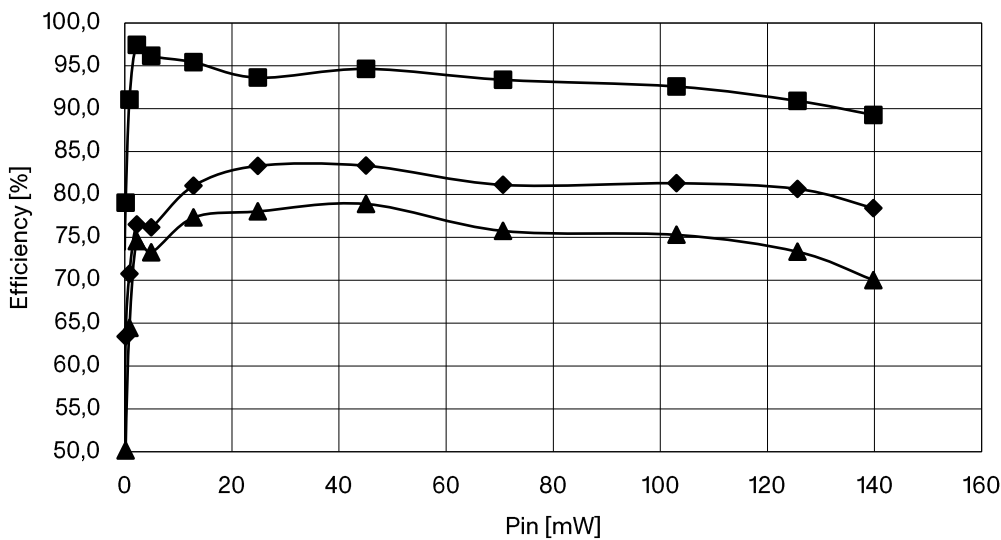

Measured at room temperature using Exeger Boost102 reference design and output to 3.7V LiPo battery.

Same values as graph

| Pin [mW] | DC/DC [%] | Tracking [%] | Overall [%] |
|----------|-----------|--------------|-------------|
| 0.09     | 46.9      | 73.6         | 34.5        |
| 0.26     | 63.4      | 79.0         | 50.1        |
| 0.97     | 70.8      | 91.1         | 64.4        |
| 2.35     | 76.5      | 97.4         | 74.5        |
| 5.03     | 76.2      | 96.2         | 73.2        |
| 12.95    | 81.0      | 95.4         | 77.3        |
| 24.96    | 83.3      | 93.6         | 78.0        |
| 45.18    | 83.4      | 94.6         | 78.9        |
| 70.74    | 81.1      | 93.4         | 75.7        |
| 103.12   | 81.3      | 92.6         | 75.3        |
| 125.75   | 80.6      | 90.9         | 73.3        |
| 139.90   | 78.4      | 89.3         | 70.0        |